

“Plug-n-Play” #600 Series DVR Quick Network



1. The ID number of the products has been set up in the factory, click **[tool bar]-[system setting]-[user]** as shown in figure (1.1), the screen will display user manager menu, and you will see the ID number as shown in figure (1.2).



(1.1)




(1.2)

2. Then open the menu, click **[network]-[other settings]-[auto ID]**, to open the auto ID as shown in figure (2.1) (2.2)
3. When using the router to search Internet, first you should map the transmit codex of the router's port or **open the UPNP** as shown in figure (2.2), then the router will map the port automatically, as shown in figure (3.1) (3.2)



(2.1)

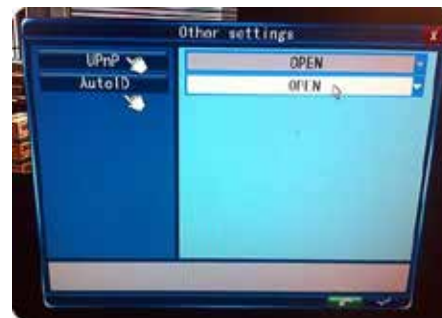

(2.2)



(3.1)



(3.2)

4. When the network is connected, input **http://www.ipremoteview.com** in the address field of the web browser. Then input the ID of the DVR into the products number as shown below in figure (4.1) (4.2).



5. After the connection has succeeded it will switch to the Web Application Management page as shown in figure (5.2) (5.3)

